




Con-Steel

Prefabricated Steel Buildings




Con-Solid

Heavy-Duty Living Containers



Con-Flat

Modular Living Containers

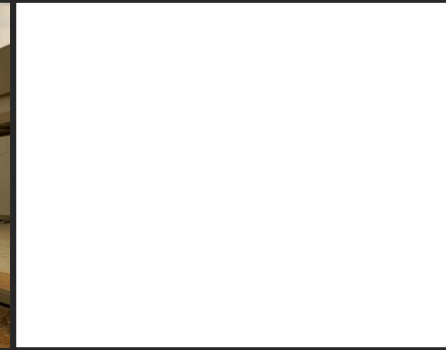

Con-Cabin

Singular Living Cabins



Con-Frame

LSF Building System



CON-IMEX PREFABRİK İNŞAAT SANAYİ VE TİCARET LİMİTED ŞİRKETİ

Merkez/Head Office: Hacı Sabancı Organize Sanayi Bölgesi OSB 23 Nisan Cad. No:8 Adana/Türkiye

Tel: +90 (322) 394 47 53 Fax: +90 (322) 394 47 56

İstanbul Ofis/Sales Office: Barbaros Bul. Menekşe Apt. No:54 Kat 3 Daire 8 Beşiktaş-İstanbul/Türkiye

Tel: +90 (212) 216 22 55 Fax: +90 (212) 216 22 57

e-mail: info@con-imex.com www.con-imex.com



Hayalleri Gerçekleştiren Çözümler!
Solutions which make dreams come true!

Con-Flat

Modular Living Containers

Con-imex's first design Con-flat, offers limitless solutions in your projects due to its modularity and multi layering property.

General Features

- Ability to join modules in any given direction which offers you to create any type of area required
- The system is carried by the columns, not panels which will allow you to move the panels any time you desire
- Door and window panels can be relocated at will
- The system allows you to design projects up to 3 storey buildings
- The use of a single middle chassis in multi storey structures that serves both as a floor and a ceiling
- Electric cabling can be hidden in the panels or maintained inside cable trays according to your request
- 8 units of 20 feet modules can be loaded in a single TIR truck
- 2 units of 20 feet assembled modules can be loaded in a single TIR truck
- Can be erected on level concrete ground or on concrete blocks

Technical Specifications

Main Frame Structural system is maintained by cold-formed steel profiles in different thickness and sizes

Walls 50mm thickness of polyurethane sandwich panels are used both as interior and exterior walls. The internal and external surfaces of the panels are covered with 0,5mm RAL 9002 polyester dyed galvanized metal sheets

Floor Protection: 0,4mm galvanized metal sheet
Insulation: 50mm glasswool
Vapor Barrier: 100 micron polyethylene
Covering: 18mm OSB-3 (cement board for wet areas) + 2mm PVC floor covering

Ceiling Roof: 0,8mm galvanized metal sheet
Insulation: 50mm glasswool
Vapor Barrier: 100 micron polyethylene
Covering: 8mm laminated chipboard

Doors Polyurethane paneled PVC/Aluminum doors

Windows 4+12+4 double glazed PVC/Aluminum windows



Ability to join modules in any given direction which offers you to create any type of area required



The system is carried by the columns, not panels which will allow you to move the panels any time you desire



Door and window panels can be relocated at will



The system allows you to design projects up to 3 storey buildings



The use of a single middle chassis in multi storey structures that serves both as a floor and a ceiling



Electric cabling can be hidden in the panels or maintained inside cable trays according to your request



8 units of 20 feet modules can be loaded in a single TIR truck



2 units of 20 feet assembled modules can be loaded in a single TIR truck



Can be erected on level concrete ground or on concrete blocks